

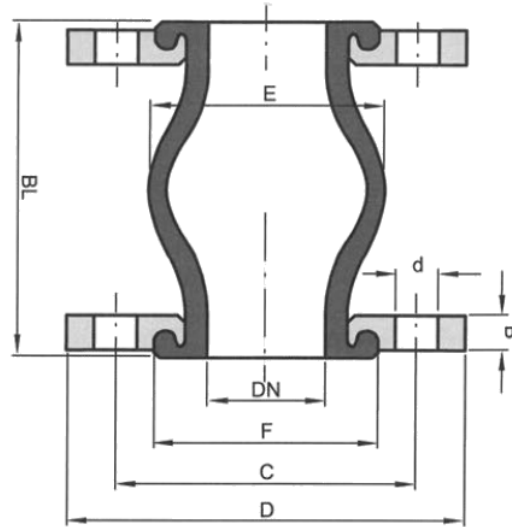
EXPANSION JOINT TEGUFLEX P

130062
Applications:

For all types of industrial applications, residential houses, industrial plants, industrial premises as well as heating and sanitary applications.

Compensate for thermal elongation and misalignment.

Isolate vibrations, dampen noise and pressure surges in connection with engines, pumps, turbines etc.


Materials:

Rubber bellows: EPDM, NBR, Hypalon, SBR

Flanges: Zink plated steel flanges

Acc. to PN 6/10/16

Optional:

Teflon lining

Vacuum rings

Flame guard

Stainless Steel flanges

DN mm	BL mm	Eff. cross-sectional Q(cm) mm	(E) mm	(F) mm	Premissible movements				Max. Vacuum		Weight	
					Comp- ression mm	Elong- ation mm	Lateral mm	Ang- olar	W/o support ring bar	With support ring bar	Incl. flange kg	Incl. Tie-rod flange kg
25/32	130	35	77	72	30	20	20	35°	0,8	1,0	2,8	4,5
40	130	50	85	80	30	20	20	35°	0,8	1,0	3,3	4,8
50	130	74	95	90	30	20	20	35°	0,7	1,0	3,7	5,0
65	130	87	110	105	30	20	20	30°	0,6	1,0	4,8	6,4
80	130	20	125	120	30	20	20	30°	0,5	1,0	5,3	7,5
100	130	143	145	140	30	20	20	25°	0,5	1,0	6,2	9,k0
125	130	210	170	165	30	20	20	25°	0,4	1,0	8,2	11,2
150	130	283	195	190	30	20	20	15°	0,3	1,0	11,2	13,4
200	130	525	245	250	30	20	20	15°	0,3	1,0	16,8	19,4
250	130	636	295	300	30	20	20	10°	0,2	1,0	21,6	25,4
300	130	897	345	350	30	20	20	10°	0,2	1,0	30,1	33,1
350	130	-	-	-	30	20	20	10°	0,2	1,0	42	-