



# FIRE VALVE DN65 PN16


Angled type

90-00000040  
356722

**DESCRIPTION:** Bronze RG5 body soft sealing fire valve. Rising stem with bolted bonnet. Angled hose connection. Raised face flanged inlet, BSP male threaded outlet.



## STANDARD & DESIGN:

|                      |                                       |
|----------------------|---------------------------------------|
| Material Body        | Bronze                                |
| Remark               | Connection: PN16                      |
| Throughput Direction | Angled                                |
| End Standard         | EN 1092-3 (Inlet), ISO 228-1 (Outlet) |
| Standard             | DIN                                   |
| Material Seat        | NBR                                   |
| Material Disc        | Bronze                                |
| End Type             | Flanged/Threaded                      |
| Sub Category         | FIRE                                  |
| Item Number          | 90-00000040                           |
| Category             | Valve                                 |
| Max temperature      | +60°C                                 |

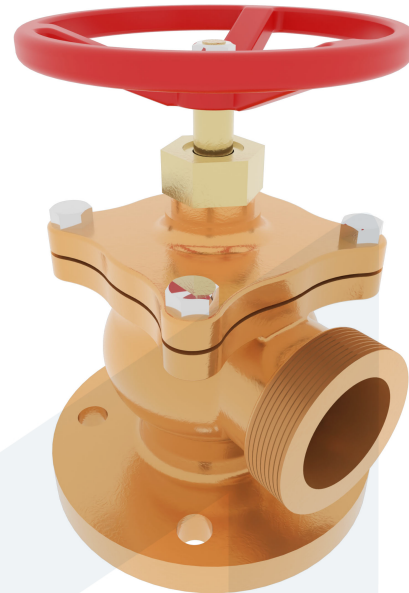

| No | Part      | Material      | Code    | Application |
|----|-----------|---------------|---------|-------------|
| 1  | Body      | Bronze        | CC 491K | Sea water   |
| 2  | Disc ring | NBR           |         | Water       |
| 3  | Disc      | Bronze        | CC 491K |             |
| 4  | Bonnet    | Bronze        | CC 491K |             |
| 5  | Gasket    | Asbestos Free |         |             |
| 6  | Stem      | Brass         | CW 614N |             |
| 7  | Handwheel | Cast Iron     | GG25    |             |

| DN | Pressure Rating Id | nxdd | Hcd | Ø D | L  | Kg   | L1 | H   | G      | Ø M |
|----|--------------------|------|-----|-----|----|------|----|-----|--------|-----|
| 65 | 16                 | 4x18 | 145 | 185 | 95 | 10.2 | 90 | 180 | 2 1/2" | 160 |

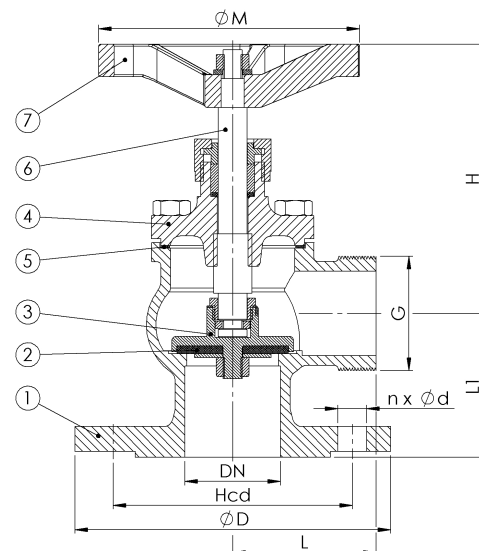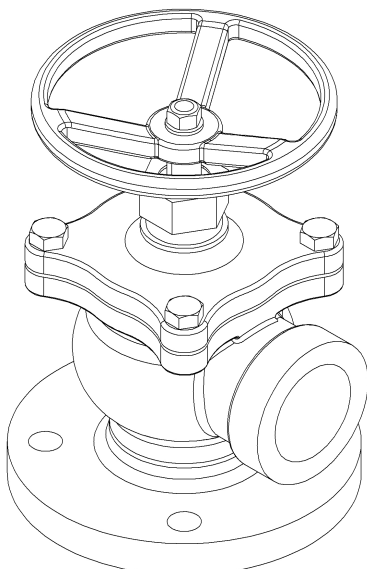

2025-05-14