



FIRE VALVE DN50 PN16


Angled type

90-00000090
356722

DESCRIPTION: Bronze RG5 body soft sealing fire valve. Rising stem with bolted bonnet. Angled hose connection. Raised face flanged inlet, BSP male threaded outlet.



STANDARD & DESIGN:

Material Body	Bronze
Remark	Connection: PN16
Throughput Direction	Angled
End Standard	EN 1092-3 (Inlet), ISO 228-1 (Outlet)
Standard	DIN
Material Seat	NBR
Material Disc	Brass
End Type	Flanged/Threaded
Sub Category	FIRE
Item Number	90-00000090
Category	Valve
Max temperature	+80°C

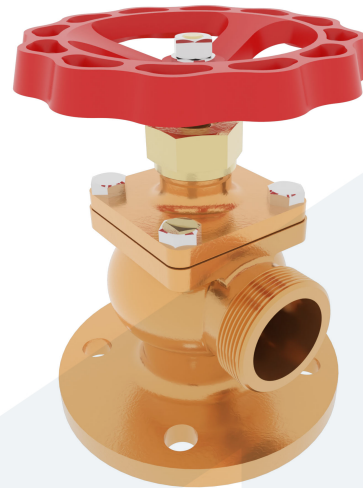

No	Part	Material	Code	Application
1	Body	Bronze	CC 491K	Sea water
2	Disc ring	NBR		Water
3	Disc	Brass	CW 710R	
4	Bonnet	Bronze	CC 491K	
5	Gasket	NBR bonded aramid		
6	Stem	Brass	CW 710R	
7	Handwheel	Cast Iron	GG25	

DN	Pressure Rating Id	nxdd	Hcd	Ø D	L	Kg	L1	H	G	Ø M
50	16	4x18	125	165	73	5.3	75	150	2"	140

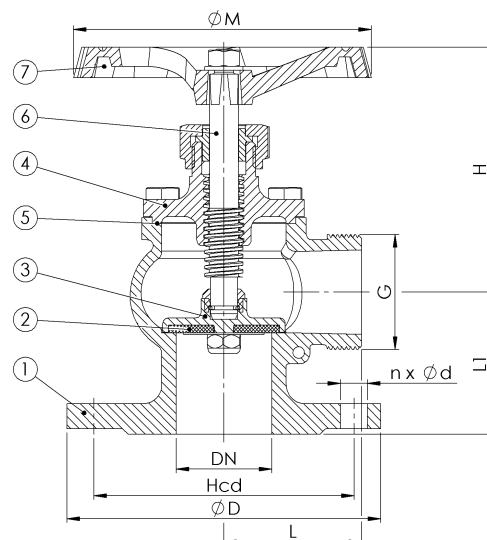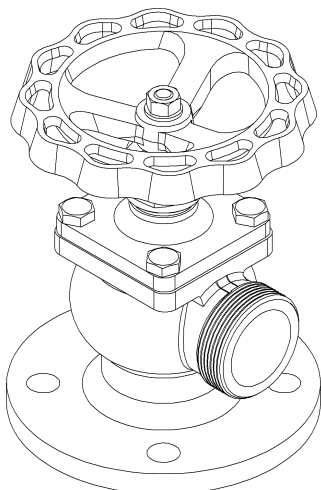

2025-05-14