

Water-cooled monoblock system for low and medium temperature refrigeration


For wall mounted installation in small and medium sized cold rooms

- Rapid mounting on the wall of the cold room by straddlemounting, which is ideal for new installations or through-wall mounting and refurbishment projects
- Metallic grey coloured finish of the outdoor unit
- The white colour of the evaporator blends unobtrusively with the cold room walls
- BHPE condenser (Brazen Plate Heat Exchanger)
- The units are provided with a control panel with an easy-to-use interface




Installation type


Through-wall model

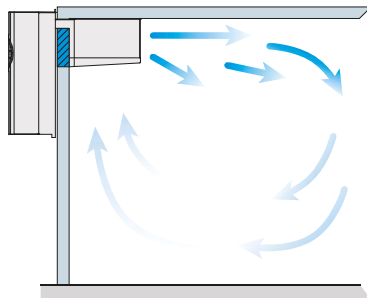


Straddle model

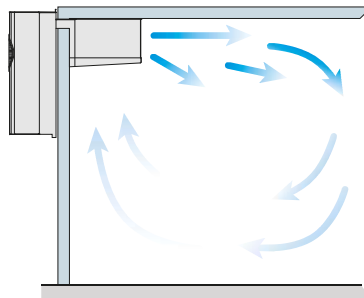

MGM1280-BGM0870

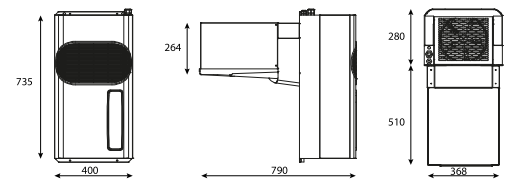

MGM2210

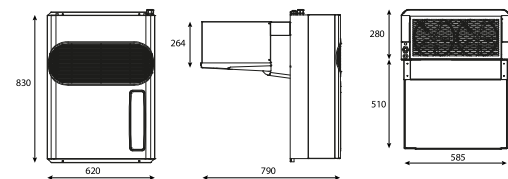

Medium temperature units		MGM1280Y1WAA	MGM2210Y1WAA
Refrigerant		R290	
Power supply	V/Ph~/Hz	220-230/1N~/50	
HP compressor		0.56	0.9
Defrost		Hot gas	
PED category		0	
Working temperature	°C	+10/-5	
Cooling capacity [TC=0°C TW=32°C]	Watt	1,338	2,266
Low temperature units		BGM0870Y1WAA	
Refrigerant		R290	
Power supply	V/Ph~/Hz	220-230/1N~/50	
HP compressor		0.9	
Defrost		Hot gas	
PED category		0	
Working temperature	°C	-15/-25	
Cooling capacity [TC=-20°C TW=32°C]	Watt	881	